

SOGEVAC SV 65 B

Rotary Vane Vacuum Pump SOGEVAC



Product-Illustration

Product Range, Features and Design

Oil sealed rotary vane vacuum pumps are being used in all areas of vacuum engineering. They are equally suited for both industrial production and research applications. They may be used to generate a rough and medium vacuum or as backing pumps in pump combinations with Roots pumps or high vacuum pumps. By design, rotary vane pumps run quietly and do not produce much noise.

Application Examples

- Car industry
- Food industry
- Furnaces and plants
- Laser technology
- Medicinal technology
- Metallurgy
- Power engineering, long-distance energy
- Space simulation
- Vacuum coating

Product-Description

Leybold.com



SOGEVAC SV 65 B

Rotary Vane Vacuum Pump SOGEVAC

Advantages to the User

- •Continuous operation from atmospheric pressure to ultimate pressure
- •High pumping speed also at low pressures
- Low noise level
- Low vibrations
- •Integrated exhaust filter, up to 99.9% efficient
- •No oil loss owing to the integrated oil return line
- Exhaust gas free of oil mists
- Efficient air cooling (standard)
- Water cooling (optional)
- •Low space requirement, easy to install
- Rugged
- Maintenance-friendly
- Compact design
- •For direct fitting to Roots pumps from SV 100 B or SV 100 up
- Optimum size-to-performance ratio
- High water vapor tolerance
- •For use in various applications
- •Wide range of accessories available for adaptation to differing problems

Compact Design

The pumps have been so designed that efficiency of the pumps will be high.

Supplied Equipment


All pumps are delivered with the required quantity of oil: SV 10 B to SV 65 (B) in a separate canister, whereas the SV 100 (B) to SV 1200 already contain the oil and are thus ready for operation.



SOGEVAC SV 65 B

Rotary Vane Vacuum Pump SOGEVAC

Illustrations

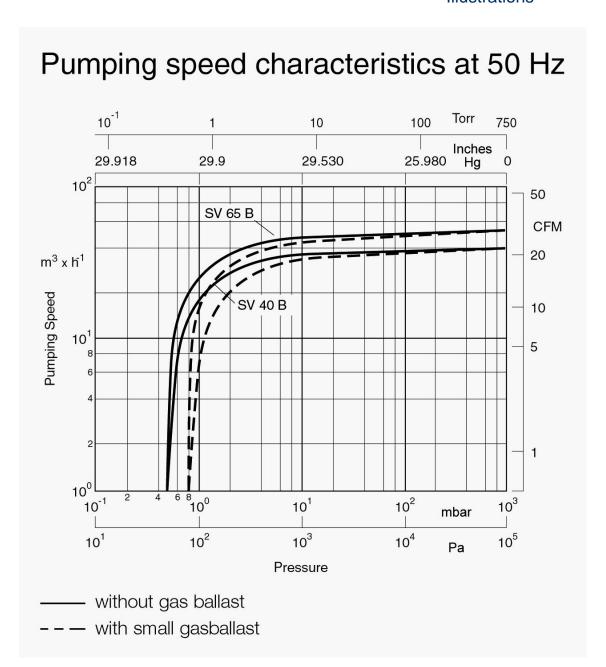





SOGEVAC SV 65 B

Rotary Vane Vacuum Pump SOGEVAC

Illustrations

Dimensional drawing

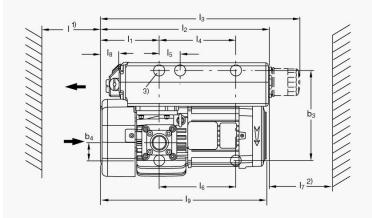



 h_1

 h_2

- 1) Space for fitting the exhaust filter
- 2) Space for the motor's ventilation
- 3) Only SV 65 B

Туре

all dimensions in mm

SV 65 B	mm	320	170	95	254	50	266	26	4 21	6
	in.	12.6	6.69	3.74	10.0	1.97	10.4	17 10.39 8.50		
Туре			I ₁	l ₂	l ₃	14	l ₅	I ₆	17	l ₈
SV 65 B	mm	350	166	480	565	215	_	215	150	52
	in.	13.78	6.54	18.9	22.2	8.46	-	8.46	5.91	2.0

 b_4

 b_1